




COLD FORMED STEEL STRUCTURAL STUD

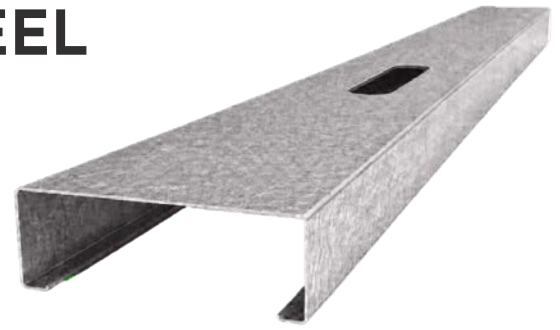

Stud structural members designed for load-bearing wall framing. Selected profiles may also be used as floor or roof joists when specified by the project engineer.

UNDERSTANDING THE PRODUCT DESIGNATION

EX: 600S162-54

600 (a)
6 in. web

S
stud or track

162 (b)
1 5/8 in. flange

54
54 mil thickness



STUD DESIGNATIONS

**CAN BE USED AS STRUCTURAL JOIST*

	Web (W)		Flange (F)	
	in.	mm	in	mm
250S162-33, 43, 54, 68, 97	2 1/2	63.50	1 5/8	41.28
250S200-33, 43, 54, 68, 97	2 1/2	63.50	2	50.80
250S250-33, 43, 54, 68, 97	2 1/2	63.50	2 1/2	63.50
362S162-33, 43, 54, 68, 97	3 5/8	92.08	1 5/8	41.28
362S200-33, 43, 54, 68, 97	3 5/8	92.08	2	50.80
362S250-33, 43, 54, 68, 97	3 5/8	92.08	2 1/2	63.50
400S162-33, 43, 54, 68, 97	4	101.60	1 5/8	41.28
400S200-33, 43, 54, 68, 97	4	101.60	2	50.80
400S250-33, 43, 54, 68, 97	4	101.60	2 1/2	63.50
550S162-33, 43, 54, 68, 97	5 1/2	139.70	1 5/8	41.28
550S200-33, 43, 54, 68, 97	5 1/2	139.70	2	50.80
550S250-33, 43, 54, 68, 97	5 1/2	139.70	2 1/2	63.50
*600S162-33, 43, 54, 68, 97	6	152.40	1 5/8	41.28
*600S200-33, 43, 54, 68, 97	6	152.40	2	50.80
*600S250-33, 43, 54, 68, 97	6	152.40	2 1/2	63.50
*800S162-33, 43, 54, 68, 97	8	203.20	1 5/8	41.28
*800S200-33, 43, 54, 68, 97	8	203.20	2	50.80
*800S250-33, 43, 54, 68, 97	8	203.20	2 1/2	63.50
*1000S162-33, 43, 54, 68, 97	10	254	1 5/8	41.28
*1000S200-33, 43, 54, 68, 97	10	254	2	50.80
*1000S250-33, 43, 54, 68, 97	10	254	2 1/2	63.50
*1200S162-33, 43, 54, 68, 97	12	304.80	1 5/8	41.28
*1200S200-33, 43, 54, 68, 97	12	304.80	2	50.80




SCAN OR
CLICK TO VIEW
LOAD TABLES





COLD FORMED STEEL STRUCTURAL TRACK

Track structural members used as top and bottom track in load-bearing wall assemblies. Selected profiles may also be used as rim track in engineered floor or roof joist systems.

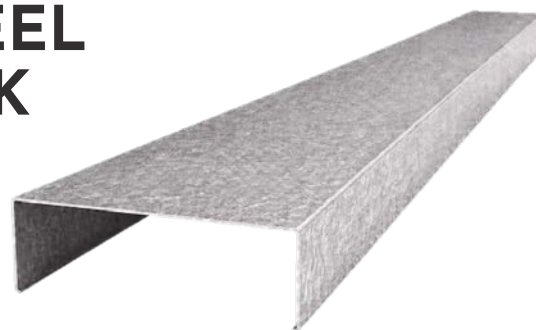

UNDERSTANDING THE PRODUCT DESIGNATION


EX: 600T200-33

600 (a)
6 in. web

T
stud or track

200 (b)
2 in. flange

33
33 mil thickness



TRACK DESIGNATIONS

**CAN BE USED AS STRUCTURAL JOIST*

TRACK DESIGNATIONS <i>*CAN BE USED AS STRUCTURAL JOIST</i>	Web (W)		Flange (F)	
	in.	mm	in	mm
250T200-33, 43, 54, 68, 97	2 1/2	63.50	2	50.80
250T250-33, 43, 54, 68, 97	2 1/2	63.50	2 1/2	63.50
250T300-33, 43, 54, 68, 97	2 1/2	63.50	3	76.20
362T200-33, 43, 54, 68, 97	3 5/8	92.08	2	50.80
362T250-33, 43, 54, 68, 97	3 5/8	92.08	2 1/2	63.50
362T300-33, 43, 54, 68, 97	3 5/8	92.08	3	76.20
400T200-33, 43, 54, 68, 97	4	101.60	2	50.80
400T250-33, 43, 54, 68, 97	4	101.60	2 1/2	63.50
400T300-33, 43, 54, 68, 97	4	101.60	3	76.20
550T200-33, 43, 54, 68, 97	5 1/2	139.70	2	50.80
550T250-33, 43, 54, 68, 97	5 1/2	139.70	2 1/2	63.50
550T300-33, 43, 54, 68, 97	5 1/2	139.70	3	76.20
600T200-33, 43, 54, 68, 97	6	152.40	2	50.80
600T250-33, 43, 54, 68, 97	6	152.40	2 1/2	63.50
600T300-33, 43, 54, 68, 97	6	152.40	3	76.20
800T200-33, 43, 54, 68, 97	8	203.20	2	50.80
800T250-33, 43, 54, 68, 97	8	203.20	2 1/2	63.50
800T300-33, 43, 54, 68, 97	8	203.20	3	76.20
*1000T200-33, 43, 54, 68, 97	10	254.00	2	50.80
*1000T250-33, 43, 54, 68, 97	10	254.00	2 1/2	63.50
*1000T300-33, 43, 54, 68, 97	10	254.00	3	76.20
*1200T200-33, 43, 54, 68, 97	12	304.80	2	50.80
*1200T250-33, 43, 54, 68, 97	12	304.80	2 1/2	63.50



SCAN OR
CLICK TO VIEW
LOAD TABLES

